

FTTx Wall Enclosure Series

CONNECTING HOMES

# enlighten TEN-FWO16

The TEN-FWO16 is a compact enclosure designed to support gas blocks on entry, featuring a practical fibre management system and a robust method for securing microducts. It accommodates two adapters—SC-simplex/LC-duplex—providing versatile connectivity options. Installation is straightforward and highly efficient, making the TEN-FWO16 an optimal choice for providing seamless, rapid and reliable customer connections.

## Features

- Compact enclosure
- Supports gas blocks on entry
- Practical fibre management system
- Supports SC (simplex) / LC (duplex) adapters
- Offers a quick and straightforward installation
- Reliable performance across a broad temperature range




**TELESTE**


## enlighten FTTx PASSIVES / FTTx WALL ENCLOSURE SERIES

GENERAL			
Capacity	2 fibres	Supported adaptors	2 x SC (simplex), 2 x LC (duplex)
Dimension (LxWxH)	90 x 115 x 23 mm	IP rating	IP40
Material	PC+ABS	Operating temperature	-40 - +80 °C
Colour	White		

### MECHANICAL LAYOUT

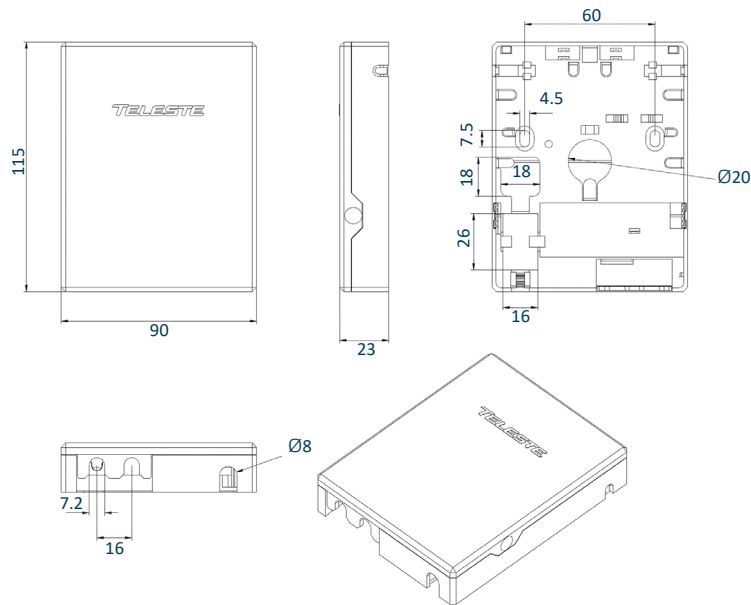

### IMAGE GALLERY

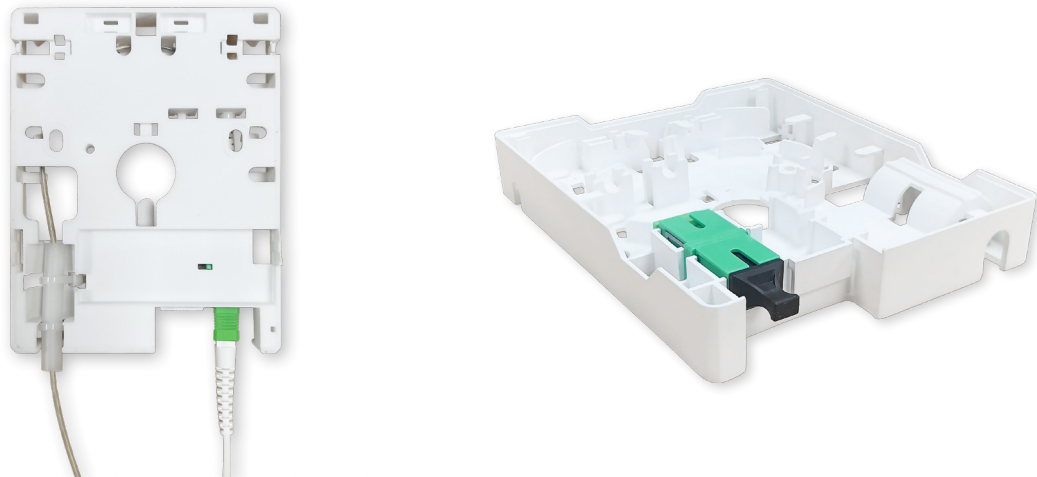

### ORDERING INFORMATION

P/N	DESCRIPTION
TEN- FW016	Compact IP40 customer connection enclosure



TELESTE CORPORATION

[www.teleste.com](http://www.teleste.com)

Enlighten TEN-FW016\_240904

Copyright © 2024 Teleste Corporation. All rights reserved. Teleste and the Teleste logo are registered trademarks of Teleste Corporation. Other product and service marks are property of their respective owners.

Teleste reserves the right to make changes to any features and specifications of the products without prior notice. Although the information in this document has been reproduced in good faith, the contents of this document are provided "as is". Teleste makes no warranties of any kind in relation to the accuracy, reliability or contents of this document, except as required by applicable law.