

IN-HOME NETWORKS

enlighten **TEN-FW07** FTTH WALL OUTLET

This FTTH Wall Outlet is designed to accommodate the termination of installation cables to pigtails and provides an interface between the network and the customer device, it is specifically designed for Din Rail mounting and is particularly suitable for installation in service and riser cupboards of buildings.

Features

- Fits alongside other similar devices that use standard DIN rail mounting solutions.
- Hinged protective lids, providing easy access to the panels.
- Extremely compact and clever design that provides swift and easy installation.
- Accommodates four optical adapters and comes with colour coded optical access ports.
- Delivered empty or with adaptor(s) and/or with pigtail(s) in a suitable box.






enlighten OPTICAL PASSIVES / FTTH OUTLET SERIES


GENERAL			
Dimension (LxWxH)	95 x 61 x 31.5 mm	IP Rating	20
Material	Thermoplastic	Supported adaptors	SC, LC
Material Flammability Rating	HB (UL94)	Weight	43 g
Operating temperature	-40 - +85 °C	Colour	White (RAL9010)





mounting

TEN-FWO7 offers efficient fibre splicing capabilities

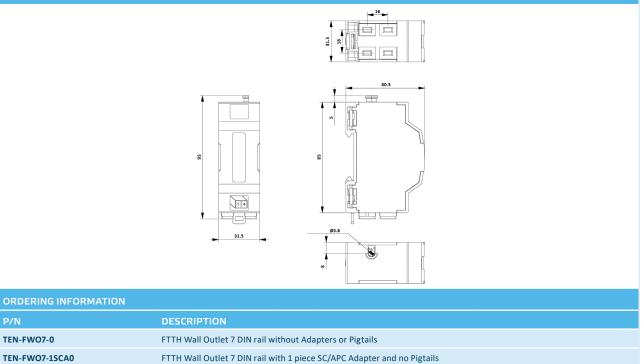

TEN-FW07-4SCA0 FTTH Wall Outlet 7 DIN rail with 4 pieces SC/APC Adapter and no Pigtails



TELESTE CORPORATION www.teleste.com

Enlighten FTTH Outlet Series TEN-FW07_250306

Copyright © 2025 Teleste Corporation. All rights reserved. Teleste and the Teleste logo are registered trademarks of Teleste Corporation. Other product and service marks are property of their respective owners. Teleste reserves the right to make changes to any features and specifications of the products without prior notice. Although the information in this document has been reproduced in good faith, the contents of this document are provided "as is". Teleste makes no warranties of any kind in relation to the accuracy, reliability or contents of this document, except as required by applicable law.