



FTTH Outlet Series - TEN-FW010B

IN-HOME NETWORKS

enlighten TEN-FW010B - FTTH Wall Outlet

This FTTH wall outlet is designed to serve as a termination point for drop cables, connecting them with patch cables in FTTH indoor applications. It integrates fiber splicing, termination, storage and cable connection in one solid protection box. A backbox has been integrated into the design to accommodate spare cable.

Features


- Small size and light weight
- Easy to install and use
- Double-layer design for easier installation and maintenance
- Integrated back box supports up to 3m of 3.5mm cable
- Cable entry from bottom, top and sides



TELESTE

GENERAL			
Supported adaptors	2 x SC (simplex) or 2 x LC (duplex)	Supported / recommended fiber type	G.657.A1
Material	PC+ABS	Flame rating	UL94 V-0
Dimension (LxWxH)	100 x 79 x 22 mm	Colour	White
Operating temperature	-40 - +85 °C	Weight	0,054 Kg

DETAILS

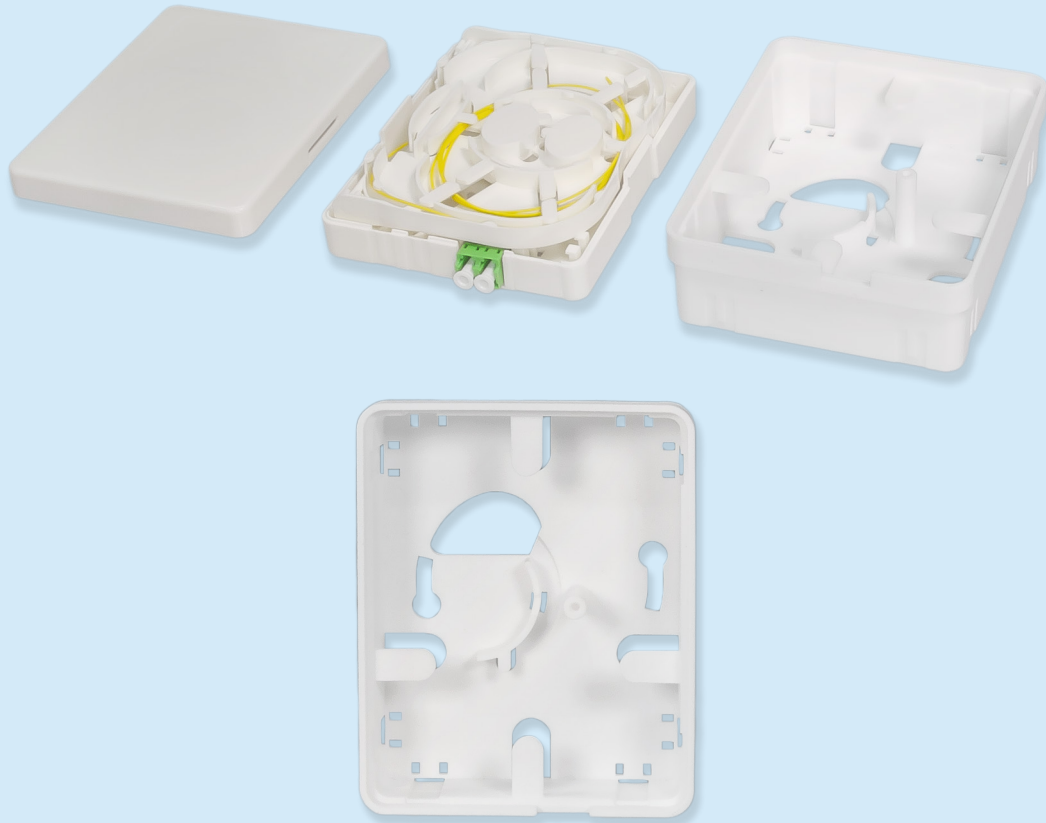

ORDERING INFORMATION

P/N	DESCRIPTION
TEN-FW010-2LCA1P	FTTH wall outlet 10 with 1pc LC/APC duplex adapter and 1pc LC/APC pigtail
TEN-FW010B-0	FTTH wall outlet 10 including backbox empty
TEN-FW010B-2LCA1P	FTTH wall outlet 10 including backbox with 1pc LC/APC duplex adapter and 1pc LC/APC pigtail

Option: Customer logo printing at the front on request



TELESTE CORPORATION
www.teleste.com

Enlighten TEN-FW010B_20240618

Copyright © 2024 Teleste Corporation. All rights reserved. Teleste and the Teleste logo are registered trademarks of Teleste Corporation. Other product and service marks are property of their respective owners. Teleste reserves the right to make changes to any features and specifications of the products without prior notice. Although the information in this document has been reproduced in good faith, the contents of this document are provided "as is". Teleste makes no warranties of any kind in relation to the accuracy, reliability or contents of this document, except as required by applicable law.